

QT-ZR - DUAL THERMOSTAT



- » Simple to Mount
- » High Switching Performance
- » Separate adjustable temperatures
- » Change-over contact
- » Potential free contact



1
YEARS WARRANTY



DIN RAIL MOUNT




INDUSTRIAL GRADE


TECHNICAL PARAMETER

Setting Range	0 to +60°C
Sensor Element	Thermostatic Bimetal
Type	Change-over
Contact Type	Snap-action Contact
Contact Resistance	<10mΩ
Service Life	100,000 cycles
Max. Switching Capacity	250VAC, 10 (2) A / 120VAC, 15 (2) A DC 30W at 24VDC to 72VDC
EMC	Acc to EN 55014-1-2, EN 61000-3-2, EN 61000-3-3
Connection	2-pole terminal, clamping torque 0.5Nm max. rigid wire 2.5mm ² , stranded wire 1.5mm ² (with wire end ferrule)
Connection Casing	Plastic according to UL94 V-0, Light Grey
Mounting	Clip for 35mm DIN rail, EN 50022
Operating / Storage Temperature	-20 To +80°C (-4 to +176°F)
Operating Humidity	max. 90% RH (non-condensing)
Weight	45 gm
Dimensions	67 x 50 x 46mm
Protection Type	IP20
Certification	CE, RoHS Compliance

QT-ZR



Wiring Diagram

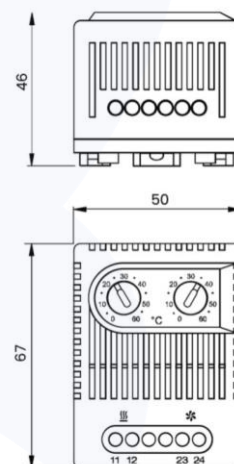

Drawing

