

QT-TL55 – TOWER LIGHT



1
YEARS WARRANTY



INDUSTRIAL GRADE




- » Enhanced body construction for performance in harsh environments
- » Available in DC24V, 12V
- » Available in Off-White/Black
- » Upto 7 STEPS with 7 color options
- » Multiple mounting options: Direct, L-bracket, circular bracket
- » Bright, uniform lighted segments
- » Rugged, cost-effective, and easy-to-install multi-segment
- » High Grade polycarbonate Body for break-free housing
- » Over voltage Protection & Constant Current operation
- » Alarm function and flashing function available

TECHNICAL PARAMETER

Supply Voltage	24V DC
Voltage Range	20V~28V DC
Color	Red, Yellow, Green, Blue, Orange, Purple, White
Diameter	Ø55 mm
Material	Polycarbonate (PC)
Electrical Protection	Reverse Polarity Protection
Color	Off White
Operating Temperature	-20 To +70°C
Mounting	Base Mounting / Stand Mounting
Inputs	PNP
Certification	CE, RoHS Compliance



DIMENSIONS

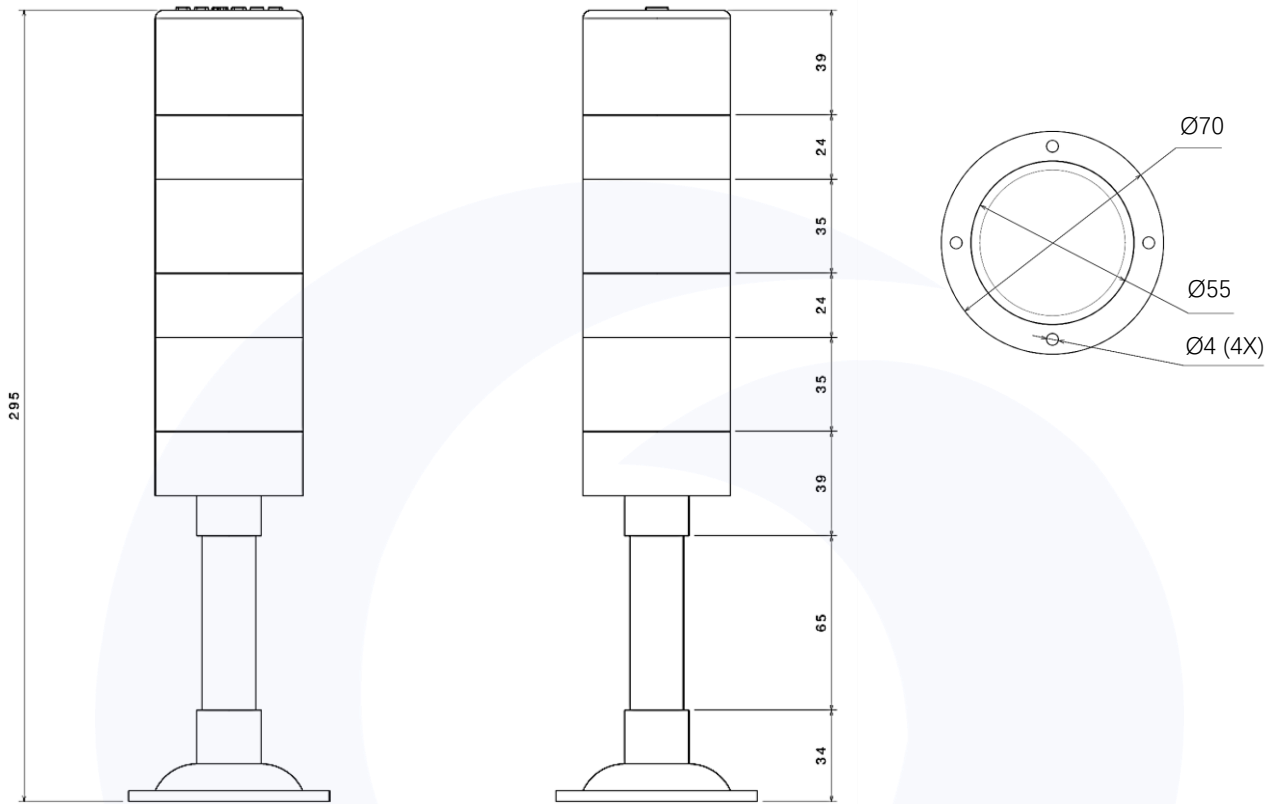

PRODUCT SELECTION TABLE

QT-TL55	X	X	PARAMETER
Channel	1		1 TIER
	2		2 TIER
	3		3 TIER
	4		4 TIER
	5		5 TIER
	6		6 TIER
	7		7 TIER
Alarm		0	Without Alarm
		A	With Alarm

* All specifications and photos are subject to change without notice

